

ARTICLE INFO:

Received : December 15, 2017

Revised : October 10, 2018

Accepted : May 31, 2019

CT&F - Ciencia, Tecnología y Futuro Vol 9, Num 2 December 2019. pages 53 - 60

DOI : <https://doi.org/10.29047/01225383.179>



THERMOHYDRAULIC MODELING IN TRANSIENT STATE FOR EVALUATION OF PIPELINE SHUTDOWN AND RESTART PROCEDURES

■ MODELAMIENTO TERMOHIDRÁULICO EN ESTADO TRANSITORIO PARA LA EVALUACIÓN DE LOS PROCEDIMIENTOS DE PARADA Y RE-ARRANQUE DE OLEODUCTOS

Bustamante-Chaverra, Carlos-Andrés^a; Nieto-Londoño, César^{b*}, Buendía-García, Jhon-Anderson^c; Novoa, Luz-Angela^c; García, Joao^d; Viviescas, Geoffrey^d

ABSTRACT

In order to study shutdown and re-start in heavy crude oil pipelines, a model was developed. It simulates, in a transient state, the behavior of pressure, flow and temperature variables, averaged over the cross-sectional area and as a function of time and the axial coordinate. The model was validated with actual operational data from a test case. Results obtained for different operating points, stopping time, crude properties, topographies and lengths are presented. Additionally, the governing equations are converted to dimensionless expressions in order to obtain the dimensionless numbers relevant to the re-start operation for crude oil pipelines.

RESUMEN

Con el objeto de modelar situaciones de parada y re arranque en oleoductos que transportan crudos pesados, se desarrolló un modelo que simula, en un estado transitorio el comportamiento de las variables de presión, flujo y temperatura, promediadas en el área transversal y en función del tiempo y de la coordenada axial. El modelo fue validado con datos operacionales reales de un caso de prueba. Se presentan resultados obtenidos para diferentes puntos de operación, tiempo de parada, propiedades del crudo, topografías y longitudes. Además, las ecuaciones gobernantes se convierten en expresiones adimensionales para obtener los números adimensionales relevantes para la operación de re-arranque de oleoductos.

KEYWORDS / PALABRAS CLAVE

Heavy crude | Pipeline | Correlations | Extra-Heavy crude | Light crude | Viscosity | Re-start | Transient state | Modeling | Simulation
Crudos pesados | Oleoducto | Correlaciones | Crudos extrapesados | Crudos livianos | Viscosidad | Re-arranque | Estado transitorio | Modelado | Simulación

AFFILIATION

^a Energy and Thermodynamics Group, Universidad Pontificia Bolivariana, Circular 1^a 70-01 (Campus Laureles), Medellín, Colombia
^b Aerospace Engineering Research Group, Universidad Pontificia Bolivariana, Circular 1^a 70-01 (Campus Laureles), Medellín, Colombia
^c Ecopetrol – Instituto Colombiano del Petróleo, km 7 via Piedecuesta- Bucaramanga, C.P 681011, Piedecuesta, Colombia
^d Universidad Pontificia Bolivariana, Autopista a Piedecuesta Kilómetro 7, Floridablanca, Colombia
*email: cesar.nieto@upb.edu.co

1 INTRODUCTION

Simplified models for transient flow in pipes have been developed from the equations used to study transient phenomena such as water hammer [1]. The model consists of equations of mass conservation, momentum and energy for average properties in the cross-sectional area for a compressible fluid, as is proposed in [8],[9]. Transient two-dimensional models, such as the one proposed in [5],[10],[14], can provide important understanding regarding the transient pipe flow phenomena. Nevertheless, computational cost associated to spatial discretization procedures makes the analysis impractical in cases where pipe length is much greater than the diameter. In those situations, a one-dimensional approach is sufficient to capture relevant aspects of transient heavy crude flow [4]; for instance, estimation of the inlet pressure that starts up the flow or determination of the maximum pressure for an imposed inlet flow rate [15].

Davidson et al. [2] developed an algebraic model based on control volumes to model the behavior of paraffinic crudes in restart situations with water or oil injection, based on the model designed by Cheng et al. [3] which improves formulations developed in [11],[12] by including compressibility and time dependent Bingham constitutive equations. The authors find that the viscoplastic behavior and compressibility of the paraffinic crude is a determining factor in restart and restoration time of operational conditions. Vinay et al. [4] solves differential and one-dimensional mass and momentum balances for a viscoplastic fluid (Bingham Plastic). The model developed is based on a two-dimensional model for barely compressible and viscoplastic flow [5]. The authors state that the use of one-dimensional models is more appropriate for applied cases, considering the aspect ratio of the pipes and the computation times. In addition to establishing relevant dimensionless numbers for the restart of crude oils, Vinay et al. [4], solve mass and momentum balances, finding the stabilization times for three important scales: compressible diffusion proportional to the dimensionless compressibility (β^*), acoustic propagation proportional to the product of β^* and Reynolds number (Re) and viscous damping proportional to Re . With a similar model but reducing dimensionality to a 1.5D approach, Wachs et al. [13] and Ahmadpour et al. [16] obtain results as accurate as the two-dimensional case, reducing computational time to a fraction of the 2D case. De Oliveira et al. [6] solve the aforementioned equations using the finite volume method, as proposed by Patankar [20], to describe the behavior of paraffinic (viscoplastic) crude in restart situations as a function of the dimensionless numbers Re , β^* , aspect ratio (δ), dimensionless gravity and the Bingham number (B). The authors conclude that with a lower Re , the time of restoration is greater, low values of β^* produce greater oscillations in the pressure increasing the

restoration time, and the dissipation of the pressure peaks is higher in horizontal tubes than vertical. Using a similar numerical method, Sun et al. [17] compare different rheological models for waxy crude oil emulsions, concluding that the model proposed by Teng and Zhang [18] adequately describes yielding phenomena. Liu et al. [7] includes the energy conservation equation in a one-dimensional differential model of transient flow in pipes based on the mathematical description of the phenomenon presented in [1]. By means of the characteristics method, the authors find restoration times of operational conditions, taking into account the thermal scale, which is significantly higher than the scales mentioned above, where only isothermal effects are considered. Based on this method, Li et al. [19] developed a computational tool to predict temperature drop after shutdown and pressure and flow rate during restart.

The model used to obtain the results presented in this article is made up of the partial equations presented by Liu et al. [7]. Although this model does not consider the viscoplastic behavior of paraffinic crudes, it can be used as a first approximation to the transient behavior of non-isothermal heavy crudes, since the variation of viscosity in terms of temperature is considered by the friction factor. Therefore, the main contribution of this paper is the implementation of a thermohydraulic model to simulate transient fluid flow and heat transfer in heavy crude pipelines considering the fact that, to the best of the authors' knowledge, numerical results for heavy crude pipe flow regarding velocity, pressure and temperature have not been obtained. Recent research on heavy crude fluid dynamics is mainly focused on experimental thermal shrinkage [22], friction reduction [23] and rheological behavior in terms of additive concentration [23],[24], water cut [25] or a lighter crude content [26]. The proposed model could include non-Newtonian behavior, thermal shrinkage and temperature dependency of transport properties. However, this work is focused on introducing a modeling methodology to simulate heavy crude pipeline flow, widening the applicability of the model implemented in [7].

In the next section, an explanation is provided regarding the model, as well as the dimensionless parameters derived from the conservation equations of mass, momentum and energy. In the last section, results are presented for a validation case as well as additional cases where, among other quantities, the crude properties (viscosity and density), length and topography of the pipeline and operation parameters of the pipeline are varied (operation flow rate). Everything mentioned previously was included in order to find relevant results for hydraulic and thermal restoration time, as well as the maximum pressure allowable in the restart process.

2. THEORETICAL FRAME

Based on the differential balances in terms of average quantities in the cross-sectional area of the pipe, it is possible to obtain a mathematical model whose solution represents the behavior of relevant variables in time and axial direction (z coordinate). The mass conservation equation can be expressed in terms of pressure (P) and the average velocity in the axial direction (V) according to equation (1), considering the compressibility effects of crude, whose relevance is given by the shrinkage exhibited by the crude oil in stop conditions, given the cooling [4].

$$\frac{\partial P}{\partial t} + V \frac{\partial P}{\partial z} + \frac{1}{\beta} \left(\frac{\partial V}{\partial z} \right) = 0 \quad (1)$$

The linear momentum conservation equation (2) includes terms of inertia, compression, friction and gravity. The effect of the viscosity of the crude oil is given by the coefficient of friction, which is also found as a function of the radius (R), the density (ρ), the velocity and the roughness from an explicit approximation of the Colebrook-White equation. Friction factor is related to temperature

by means of the Reynolds number, which is a function of viscosity. An experimentally-fitted exponential equation is used to describe viscosity behavior in terms of temperature. The angle of inclination of the pipe (θ) is found by interpolation of the pipe's topographic data, which is part of the input data for transient state simulation and, in general, can change with the distance along the pipe z .

$$\frac{\partial V}{\partial t} + \frac{1}{\rho} \left(\frac{\partial P}{\partial z} \right) + V \frac{\partial V}{\partial z} = - \frac{\lambda V |V|}{4R} - g \sin(\theta) \quad (2)$$

The conservation of energy in the crude inside the pipeline is given by the expression (3) that includes terms of temporal and spatial variation of enthalpy in terms of temperature (T), compressibility, viscous dissipation and heat loss by walls. For simplicity, the thermodynamic properties, both in this and in the other equations, are considered constant at a reference temperature. The overall heat transfer coefficient (U) is obtained by an analysis of equivalent thermal resistance in the crude-pipe-soil system, considering the conductivities of each material and the conduction resistance between the pipe and the ground.

$$\frac{\partial T}{\partial t} + \frac{T}{\rho C} \frac{\alpha}{\beta} \left(\frac{\partial V}{\partial z} \right) + V \frac{\partial T}{\partial z} = \frac{\lambda |V|^3}{4RC} - \frac{2U}{\rho RC} (T - T_0) \quad (3)$$

The initial conditions correspond to a crude oil at rest ($V(z,0)=0$), brought under the hydrostatic pressure as a function of the relative height ($h-h_0$):

$$(z,0)=p_0-(h-h_0) \quad (4)$$

The initial temperature distribution will be an input function to the model and defined according to the stop time. Two types of boundary conditions can be imposed for velocity and pressure. The first corresponds to input pressure, i.e.

$$p(0,t)=p_i \quad (5)$$

$$p(L,t)=p_o \quad (6)$$

This condition is applied in the case that one wishes to know the behavior of the velocity in time and the operation flow rate in a steady state. The second possibility is a known operating flow condition (Q):

$$V(0,t) = \frac{Q}{\pi R^2} \quad (7)$$

This condition, together with the output pressure condition (6), is used to ascertain the transient behavior of the pressure in the restart process, as well as its maximum value and steady state. Considering the hyperbolic and non-linear nature of the system of governing equations, a scheme of finite differences (MacCormack-type, explicit second order) is used for their spatial and temporal discretization. This numerical scheme is a two-step method with a first step (predictor) in which intermediate pressure, velocity and temperature are found from previous (or initial) values. The second step (corrector) uses the intermediate variable values in order to obtain a better approximation and complete time step calculations. More details about the method employed can be found in [21].

DIMENSIONLESS NUMBERS

It is possible to obtain a group of dimensionless numbers from the conservation equations (1-3) according to the strategy presented in [4]. Among other properties, the dimensionless numbers are

expressed in terms of the characteristic velocity, whose definition depends on the type of boundary conditions. In the case of known inlet pressure, it is defined as:

$$W_0 = \frac{(p_i - p_o)R^2}{\mu L} \quad (8)$$

For the second case (known operating flow), the characteristic velocity can be expressed as the average steady state velocity or:

$$W_0 = \frac{Q}{\pi R^2} \quad (9)$$

From mass conservation equation, two dimensionless parameters are obtained, the aspect ratio of the pipe (δ) and the dimensionless compressibility (β^*) which can be expressed, respectively, as:

$$\delta = \frac{R}{L} \quad (10)$$

$$\beta^* = \frac{\beta \mu W_0 L}{R^2} \quad (11)$$

The dimensionless momentum conservation equation is a function of Reynolds and Froude Numbers:

$$Re = \frac{\rho W_0 R}{\mu} \quad (12)$$

$$Fr = \frac{W_0^2}{g \Delta Z} \quad (13)$$

The average height difference can be evaluated approximately as (ΔZ) = $z_o - z_i$. It is important to note that, in this case, the sign of the Froude number must be considered in a similarity analysis. Another important dimensionless number related to the momentum is the friction factor of Darcy-Weisbach. However, this, for calculation purposes, depends on the Reynolds number and the relative roughness of the pipe, given by:

$$e = \frac{\varepsilon}{2R} \quad (14)$$

Therefore, assuring similarity of Re and e would result in the same value of the friction factor. Regarding the equation for the dimensionless conservation of thermal energy, it is possible to obtain a modified Eckert number (Ec') since it is not in terms of the temperature of the surrounding environment but in terms of the temperature of the crude output (T_o). The Eckert number establishes a relationship between the kinetic energy of the stream and the change of internal energy in the pipeline and is given by equation (15). Additionally, a relationship is obtained between the heat transferred from the crude oil and the specific heat thereof, known as the Stanton number (St), equation (16).

$$Ec' = \frac{W_0^2}{Cp(T_i - T_o)} \quad (15)$$

$$St = \frac{U}{\rho W_0 Cp} \quad (16)$$

Finally, it is possible to express the contribution of thermal energy by compression/expansion in terms of a relationship between properties of the oil identified in this document, as a relationship

between isothermal compressibility and thermal expansion (RCE), given by the following equation:

$$RCE = \frac{\alpha}{\rho C_p \beta} \quad (17)$$

The previous dimensionless numbers will be relevant in scaling processes for situations of crude oil flow in pipe in transitory state. At the time of evaluating results it will be important to express relevant variables in dimensionless terms. This is because, according to the scales used to obtain the dimensionless parameters, independent dimensionless variables are defined, such as time and distance, given by equations (18) and (19), and dimensionless dependent variables such as pressure, velocity and temperature, expressions (20), (21) and (22), respectively.

$$t^* = \frac{t W_0}{R} \quad (18)$$

$$z^* = \frac{z}{L} \quad (19)$$

$$p^* = \frac{(p - p_0)R}{\mu W_0} \quad (20)$$

$$V^* = \frac{V}{W_0} \quad (21)$$

$$T^* = \frac{T - T_0}{T_i - T_0} \quad (22)$$

Equations (1), (2) and (3) are solved for the initial and border conditions mentioned for different cases of the re-start process on an industrial scale. In the following section, one of these cases is used to perform the validation of the numerical scheme. Subsequently, results for different cases are presented and important output variables are calculated such as approximate times of hydraulic and thermal stabilization, and maximum pressure at restart and steady state.

3. RESULTS

In order to validate the numerical procedure to solve the governing equations in terms of time and axial distance, a real reference case is used, of which the following data are known, in addition to the topography and the calculated and verified pressure and temperature distribution in the steady state:

Q	= 200,000 BPD
T _i	= 170 °F
P _i	= 1000 psig
P _o	= 243.5 psig
k _T	= 28 BTU/hr ft °F
k _S	= 1.3 BTU/hr ft °F
h _T	= 1 m
T _∞	= 75 °F
ε	= 0.0018 in
°API _{@60°F}	= 16
μ _{@86°F}	= 672 cSt
μ _{@170°F}	= 74.28 cSt

The reference case corresponds to a pipeline section with a length of 84 km, an external diameter of 24 in and a pipe thickness of 0.7 in. An initial temperature distribution is assumed, given by the cooling of the pipeline at a stop in a lapse of 72 hours.

First, results are obtained for the case of known pressure at the pipeline inlet. From the results, two time scales can be differentiated. The first corresponds to the development or restoration of flow, which occurs, in this case, in a time less than 200 seconds. In this period, one sees propagation of the wave originating by the injection of crude oil at high pressure, setting the oil in motion along the pipeline, as can be seen from the pressure and flow profiles presented in **Figure 1**, where they show the distributions every 20 seconds. The small disturbances observed in the graphs are more related to the usage of a second-order numerical scheme when travelling waves are present, which is the case at small interval times after the restart operation.

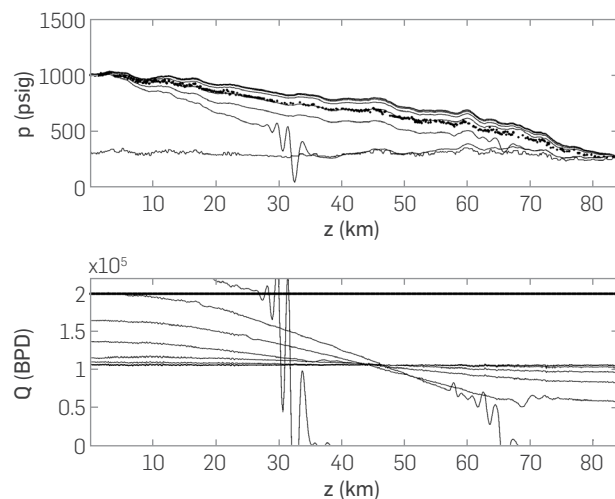


Figure 1. Pressure and flow profiles for validation case for $t < 200$ s. Continuous lines correspond to calculated pressure and flow rate distribution in intervals of 20 s. Pointed lines indicate reference distributions at steady state.

Figure 2 shows the evolution of the variables in some points of the pipeline, indicated by the label on it. The pressure increases considering a small gap between each point, according to the distance at the beginning of the pipeline. Similarly, due to the compressibility of the crude oil, the flow near the inlet exhibits a peak that decreases over time, to reach the same value for the whole pipeline. Negative flow rate values at points $x = 3/4 L$ and $x = L$ before hydraulic travelling wave, are presented because of the aforementioned numerical overshooting problems. The period in which the same flow condition is reached in the entire pipeline will be referred to in this report as hydraulic reset time (t_{rh}). However, this value is far from being equal to the time in which the steady state (t_{es}) is reached, since the temporary change in temperature occurs on a much higher time scale. It can be seen in the lower part of **Figure 2** that the change in temperature is negligible in the period analyzed. To quantify changes in temperature and its effect on the other variables, it is necessary to obtain results for longer periods.

Figure 3 shows the pressure and temperature profiles for a time of 40 hours regarding the fact that time zero corresponds to

the beginning of the restart procedure. For clarity, in the case of pressure, only the final profile is presented where a suitable estimate of the effects of the topography can be observed, with a maximum relative error of around 5%. As for temperature, the profiles obtained every 3 hours show an advance of the heating front that travels through the pipeline in the flow direction. When it reaches the end of the pipe, it still takes around 10 hours to reach the steady state, or in this case the balance between the heat generated by viscous dissipation and the heat lost by the walls of the pipe. In this case, the flow profiles are not presented since they do not offer additional information.

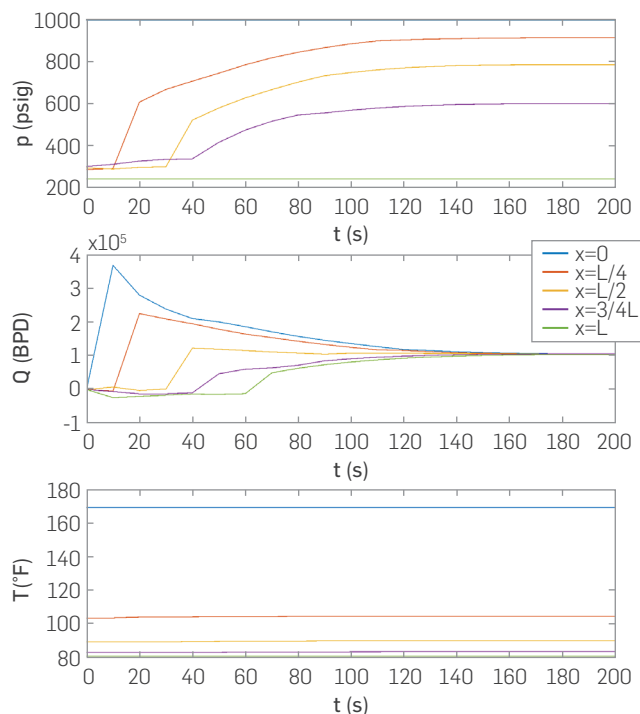


Figure 2. Evolution of average properties for $t < 200$ s

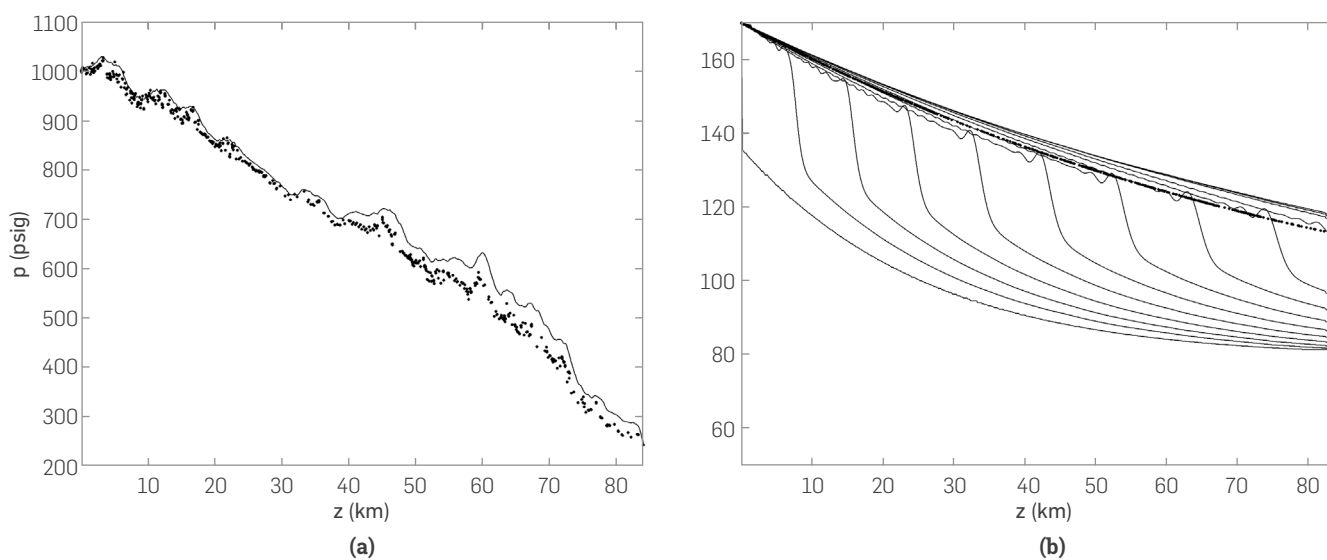


Figure 3. Pressure and temperature profiles for $t < 40$ hr. Continuous lines correspond to calculated steady state pressure and flow rate distribution in intervals of 3 hr. Pointed lines indicate reference distributions at steady state.

The increase in temperature along the pipeline causes a decrease in viscosity, which in turn causes a decrease in local pressure differences and an increase in operating flow, as can be seen in the graphs presented in **Figure 4**. In **Figure 1**, it is possible to observe that both the pressure and the flow rate after 200s are far from the reference data, indicated in the dotted graphs. After 40 hours, the steady state of the system is reached and the pressure and temperature are very close to the reference points (**Figure 3**). **Figure 4** shows that, for time after restart, having appreciable changes in temperature depends on the position in tube length; for instance, at $x=L/4$, a time close to 10 hours is needed to reach a temperature variation near to 50°C. The use of constant properties such as density, isothermal compressibility, thermal expansion and the heat capacity of the crude and the thermal conductivity of wall and floor, cause an error in the results that is reflected in the differences with the reference quantities, which in the case of the flow can reach up to 20% relative error. However, the solution procedure used can be employed for the comparative analysis of transient behavior in stop and restart situations for heavy oil pipelines.

For the sake of brevity, the results obtained for the case of known flow boundary conditions are not presented since the values in the steady state are analogous to those obtained for the first case, taking into account that the differences with respect to the reference data fall on the pressure values.

Results found by changing, among other parameters, operation volumetric flow rate, crude quality (viscosity and density) and pipe length, are shown below. For the simulation of cases, a boundary condition for flow rate operation was established. The parameters that do not vary in the simulated cases are presented in **Table 1** as input data. Among these, there are geometric aspects such as the diameter, roughness, thickness and burial distance of the pipeline, environmental conditions such as air temperature, properties such as the thermal conductivities of the pipe and the ground, and operational data such as the departure pressure and stop time; the latter defines the initial temperature distribution along the pipeline.

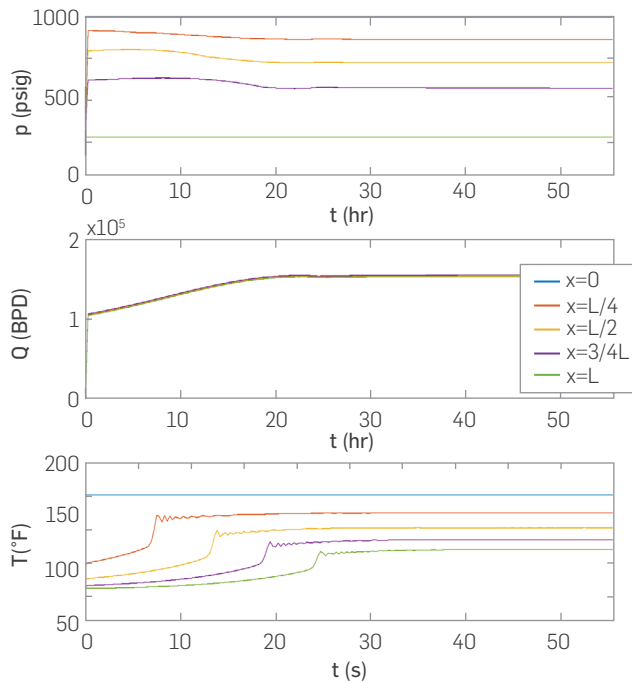


Figure 4. Evolution of average properties for $t < 40$ hours

Each case is characterized by the aforementioned parameters. **Table 2** shows the values of each of these variable parameters. Each case simulated relates to a variation of relevant properties with respect previous cases. For example, case two corresponds to case one varying the friction factor through a reduction of 27% of its original value. Case five corresponds to case three after changing pipe length, while case ten corresponds to case nine after changing the type of heavy crude oil and reducing the friction factor. Both the values of kinematic viscosity at different temperatures and the percentage of friction reduction make it possible to define the friction factor based on the viscosity model used and the direct application of the percentage on the total value of the friction factor. As it is shown in the table, the operational flow rate is changed in order to have comparable transient situations.

For brevity and ease of analysis, the results obtained are presented in **Table 3** in terms of parameters relevant to the process of re-starting the pipeline, as follows:

- Hydraulic re-start time (t_{rh}): is the time that it takes the system to restore the flow along the pipeline. It is quantified as the time where the relative error

Table 1. General conditions cases

Input data	Value
Outlet pressure (p_o) [psia]	100
Pipeline wall thermal conductivity (k_p) [Btu/h ft °F]	28
Ambient Temperature (T_∞) [°F]	70
Soil Thermal Conductivity (k_s) [Btu/h ft °F]	1.3
Buried distance (z_p) [m]	1
Pipeline roughness (ϵ) [in]	0.0018
Stop time [h]	72
Pipeline outer diameter (D_{ext}) [in]	24
Pipeline thickness [in]	0.7

between flow rates for successive times in $z = L$ (pipe output) is less than 0.1%.

- Stationary state time (t_{ee}): since time scale between the hydraulic restoration and the restoration of the pipeline operation is very different, this parameter is defined as the time that it takes the system to reach the steady state in all its variables. It is quantified as the time where the relative error between temperatures for successive times at $z = L$ (pipe exit) is less than 0.01%. The criterion is lower than in the case of the flow rate, since the percentage variation of the temperature over time is much lower for the flow rate in the first simulation interval.
- Maximum pressure at startup (p_{max}): it corresponds to the maximum pressure in the system at $z = L$ (pipe entry) during the re-start process.

- Maximum pressure time (t_{max}): is the time when the maximum pressure in the system occurs during the re-start process
- Crude oil outlet temperature (T_o): It is the crude oil temperature at the outlet of the pipeline when the steady state has been reached.

Table 2. Specific data for each simulated case

Case	Q [BPD]	Initial T [°F]	API	Density [kg/m ³]	Kinematic viscosity @86°F [cSt]	Kinematic Viscosity @180°F [cSt]	Length [km]	Friction Reduction [%]
1	61 942	170	14.7	967.85	1200	59.84	200	0
2	85 373	170	14.7	967.85	1200	59.84	200	27
3	135 437	170	14.7	967.85	1200	59.84	200	0
4	182 754	170	14.7	967.85	1200	59.84	200	27
5	96 716	170	14.7	967.85	1200	59.84	175	0
6	199 160	170	14.7	967.85	1200	59.84	175	27
7	182 260	170	14.5	968.85	1300	62.67	175	0
8	190 923	170	14.1	971.84	1700	73.16	175	27
9	158 558	130	14.2	971.17	1600	70.64	125	0
10	179 162	130	13.8	973.85	1900	78.01	125	27
11	233 110	130	13.9	973.18	1800	75.61	125	0
12	278 280	130	13.9	973.18	1800	75.61	125	27
13	290 703	170	13.9	973.18	1800	75.61	84	0
14	357 484	170	13.9	973.18	1800	75.61	84	27
15	281 469	130	13.9	973.18	1800	75.61	90	0
16	324 464	130	13.9	973.18	1800	75.61	90	27
17	213 389	103	13.9	973.18	1800	75.61	25	0
18	232 618	103	13.9	973.18	1800	75.61	25	11.8

According to the results presented in **Table 3**, the hydraulic restoration time is inversely proportional to the flow rate, i.e. the higher the flow rate, the shorter the hydraulic restitution time. In the case of the steady state time, the flow shows a similar relationship that is affected by the variation of other properties such as the kinematic viscosity of the crude, the initial temperature and the length of the pipeline. The maximum pressure that is reported in the simulation during the re-start is proportional to the operational flow and the length of the pipeline. Regarding the percentage of friction reduction, it is clear that similar maximum pressures are obtained, and hydraulic and steady-state restoration times are obtained for flow rates that differ by a percentage similar to the percentage of friction reduction; (compare cases 1 and 2, 3 and 4, 5 and 6, 7 and 8, etc). Since different parameters are varied in different cases, relationships between the other properties can be obtained by comparing results in terms of numbers and dimensionless variables.

Table 3. Results obtained for evaluated cases

Case	trh [min]	tee [h]	pmax [psig]	tmax [min]	To [°F]
1	141.6	19.7	2 352	250	80.7
2	106.6	19.7	2 185	183.3	81.2
3	121.6	25	3 918	138.3	85.3
4	173.3	21.9	3 386	100	87.4
5	103.3	21.6	2 551	155	82.8
6	60	18.6	2 714	65	90
7	85	20.8	3 759	88.3	90.3
8	80	20.5	3 516	81.6	90.6
9	125	17.7	4 991	3333.3	88.9
10	108.3	15.8	4 580	2116.6	89.7
11	111.6	17.5	6 510	138.3	96
12	86.6	27.7	5 530	1566.6	90.5
13	33.3	25	2 730	51.6	126.3
14	28.3	22.2	3 081	28.3	133.4
15	106.6	14.1	5 919	433.3	100.4
16	61.6	11.3	5 324	666.6	100.5
17	121.6	14.7	7 999	2000	94.2
18	110	14.7	7 580	2000	94

trh:hydraulic restart time, tee: stationary state time, pmax: maximum pressure at startup, tmax: maximum pressure time, To: crude oil outlet temperature

CONCLUSIONS

Based on the numerical solution of the one-dimensional balances of mass, momentum and energy in terms of average variables in the cross-sectional area, a calculation tool is obtained for the simulation of the oil pipeline restart process that, among other parameters, makes it possible to ascertain the re-start times for different operating conditions, crude properties, geometric characteristics and environmental parameters.

Results obtained by the model developed were compared with available operating data for an industrial heavy crude oil pipeline, demonstrating good prediction of the pressure distribution and temperatures in the steady state. In the case of pressure boundary condition, the operating flow in the steady state is underestimated with respect to the reference data, so it is necessary - for applications where greater precision in the results is required - to improve the calculation model for the friction coefficient and its relation to temperature.

Using the calculation tool, consistent results were obtained for 18 application cases in which, among other properties, flow of operation, pipe length, viscosity and density of crude oil, and injection temperature of crude oil varied. This demonstrates the versatility of the tool and its potential application in the prediction of flow behavior, pressure and temperature in re-start situations for oil pipelines. Nevertheless, future work must be focused on improving the numerical methods implemented in order to reduce overshooting for small time values and to improve transient behavior estimation.

ACKNOWLEDGEMENTS

The work done was with the collaboration of professionals from the Rheology and interfacial phenomena laboratory at the Ecopetrol, ICP - Innovation and Technology Center.

We thank everyone involved in the carrying out of the experimental tests, information gathering, and implementation of the activities.

REFERENCES

- [1] E. L. Bruce, W. J. Roland, Z. W. Gary., "Hydraulics of pipeline systems," FL: CRC Press, Boca Raton, 2000.
- [2] Davidson, M.R., Nguyen, Q.D., Chang, C., Rønningsen, H.P. A model for restart of a pipeline with compressible gelled waxy crude oil (2004) Journal of Non-Newtonian Fluid Mechanics, 123 (2-3), pp. 269-280. DOI: 10.1016/j.jnnfm.2004.09.007
- [3] Chang, C., Nguyen, Q.D., Rønningsen, H.P. Isothermal start-up of pipeline transporting waxy crude oil (1999) Journal of Non-Newtonian Fluid Mechanics, 87 (2-3), pp. 127-154. DOI: 10.1016/S0377-0257(99)00059-2
- [4] Vinay, G., Wachs, A., Frigaard, I. Start-up transients and efficient computation of isothermal waxy crude oil flows (2007) Journal of Non-Newtonian Fluid Mechanics, 143 (2-3), pp. 141-156. DOI: 10.1016/j.jnnfm.2007.02.008
- [5] Vinay, G., Wachs, A., Agassant, J.-F. Numerical simulation of weakly compressible Bingham flows: The restart of pipeline flows of waxy crude oils (2006) Journal of Non-Newtonian Fluid Mechanics, 136 (2-3), pp. 93-105. DOI: 10.1016/j.jnnfm.2006.03.003

- [6] de Oliveira, G.M., Rocha, L.L.V.D., Franco, A.T., Negrão, C.O.R. Numerical simulation of the start-up of Bingham fluid flows in pipelines (2010) *Journal of Non-Newtonian Fluid Mechanics*, 165 (19-20), pp. 1114-1128. DOI: 10.1016/j.jnnfm.2010.05.009
- [7] Liu, E., Li, C., Jia, W., Peng, S., Wu, X., Xu, J. Simulation of shutdown and restarting process of heated oil pipelines (2010) 2010 2nd International Symposium on Information Engineering and Electronic Commerce, IEEC 2010, art. no. 5533271, pp. 35-38. DOI: 10.1109/IEEC.2010.5533271
- [8] Li, C., Han, W. Unstable flow analysis of oil pipeline with gas (2006) *Oil and Gas Storage and Transportation*, 25 (2), pp 23-27.
- [9] Oosterkamp, A., Helgaker, J.F., Ytrehus, T. Modeling of natural gas pipe flow with rapid transients-case study of effect of ambient model (2015) *Energy Procedia*, 64 (C), pp. 101-110. DOI: 10.1016/j.egypro.2015.01.013
- [10] Frigaard, I., Vinay, G., Wachs, A. Compressible displacement of waxy crude oils in long pipeline startup flows (2007) *Journal of Non-Newtonian Fluid Mechanics*, 147 (1-2), pp. 45-64. DOI: 10.1016/j.jnnfm.2007.07.002
- [11] Sestak, J., Charles, M.E., Cawkwell, M.G., Houska, M. Start-up of gelled crude oil pipelines (1987) *Journal of pipelines*, 6, pp. 15-24.
- [12] Cawkwell, M.G. & Charles, M.E. An improved model for start-up of pipelines containing gelled crude oil (1987) *Journal of pipelines*, 7, pp. 41-52.
- [13] Wachs, A., Vinay, G., Frigaard, I. A 1.5D numerical model for the start up of weakly compressible flow of a viscoplastic and thixotropic fluid in pipelines (2009) *Journal of Non-Newtonian Fluid Mechanics*, 159 (1-3), pp. 81-94. DOI: 10.1016/j.jnnfm.2009.02.002
- [14] Majidi, S., Ahmadpour, A. Thermally assisted restart of gelled pipelines: A weakly compressible numerical study (2018) *International Journal of Heat and Mass Transfer*, 118, pp. 27-39. DOI: 10.1016/j.ijheatmasstransfer.2017.10.098
- [15] de Oliveira, G.M., Negrão, C.O.R. The effect of compressibility on flow start-up of waxy crude oils (2015) *Journal of Non-Newtonian Fluid Mechanics*, 220, pp. 137-147. DOI: 10.1016/j.jnnfm.2014.12.010
- [16] Ahmadpour, A., Sadeghy, K., Maddah-Sadatieh, S.-R. The effect of a variable plastic viscosity on the restart problem of pipelines filled with gelled waxy crude oils (2014) *Journal of Non-Newtonian Fluid Mechanics*, 205, pp. 16-27. DOI: 10.1016/j.jnnfm.2014.01.005
- [17] Sun, G., Zhang, J., Ma, C., Wang, X. Start-up flow behavior of pipelines transporting waxy crude oil emulsion (2016) *Journal of Petroleum Science and Engineering*, 147, pp. 746-755. DOI: 10.1016/j.petro.2016.10.007
- [18] Teng, H., Zhang, J. A new thixotropic model for waxy crude (2013) *Rheologica Acta*, 52 (10-12), pp. 903-911. DOI: 10.1007/s00397-013-0729-z
- [19] Li, C., Jia, W., Liao, K., Wu, X. Heated Oil Pipeline Shutdown and Restart Simulation Software Development Using VB and MATLAB Hybrid Programming (2012) *International Journal of Education and Management Engineering*, 2, pp. 6-12. DOI: 10.5815/ijeme.2012.02.02
- [20] Patankar, S.V. *Numerical Heat Transfer and Fluid Flow*, Taylor & Francis, Washington, 1980.
- [21] Tannehill, J.C., Anderson, D.A., Pletcher, R.H. *Computational fluid mechanics and heat transfer*, Taylor & Francis, Washington, 1997.
- [22] Phillips, D.A., Forsdyke, I.N., McCracken, I.R., Ravenscroft, P.D. Novel approaches to waxy crude restart: Part 1: Thermal shrinkage of waxy crude oil and the impact for pipeline restart (2011) *Journal of Petroleum Science and Engineering*, 77, pp. 237-253. DOI: 10.1016/j.petro.2010.11.009
- [23] Martínez-Palou, R., Mosqueira, M.L., Zapata-Rendón, B., Mar-Juárez, E., Bernal-Huicochea, C., Clavel-López, J.C., Aburto, J. Transportation of heavy and extra-heavy crude oil by pipeline: A review (2011) *Journal of Petroleum Science and Engineering*, 75, pp. 274-282. DOI: 10.1016/j.petro.2010.11.020
- [24] Gonçalves dos Santos, R., Briceño, M., Loh, W. Laminar pipeline flow of heavy oil-in-water emulsions produced by continuous in-line emulsification (2017) *Journal of Petroleum Science and Engineering*, 156, pp. 827-834. DOI: 10.1016/j.petro.2017.06.061
- [25] Taborda, E., Alvarado, V., Cortés, F. Effect of SiO₂-based nanofluids in the reduction of naphtha consumption for heavy and extra-heavy oils transport: Economic impacts on the Colombian market (2017) *Energy Conversion and Management*, 148, pp. 30-42. DOI: 10.1016/j.enconman.2017.05.055
- [26] Zhang, J., Chen, X.P., Zhang, D., Xu, J.Y., Rheological behavior and viscosity reduction of heavy crude oil and its blends from the Sui-zhong oilfield in China (2017) *Journal of Petroleum Science and Engineering*, 156, pp. 563-574. DOI: 10.1016/j.petro.2017.06.038

NOMENCLATURE

Re:	Reynolds number
Ec':	Modified Eckert number
St:	Stanton number
Fr:	Froude number
RCE:	crude oil compressibility and thermal expansion relationship
ρ :	crude oil density (lbm/ft ³)
C:	crude oil specific heat (Btu/lbm/°F)
μ :	crude oil dynamic viscosity (cP)
α :	crude oil thermal diffusivity (ft ² /s)
R:	pipe radius (ft)
θ :	pipe inclination angle (°)
e:	pipe roughness (ft)
e:	relative pipe roughness
U:	overall heat transfer coefficient (Btu/hr/ft ² /°F)
kt:	pipe thermal conductivity (Btu/hr/ft/°F)
ks:	soil thermal conductivity (Btu/hr/ft/°F)
T _∞ :	ambient temperature (°F)
T _i :	crude oil inlet temperature (°F)
T _o :	crude oil outlet temperature (°F)
P _i :	crude oil inlet pressure (psig)
P _o :	crude oil outlet pressure (psig)
t _{rh} :	hydraulic restart time (min)
t _{ee} :	stationary state time (hr)
p _{max} :	maximum pressure at startup (psig)
t _{max} :	maximum pressure time (min)