

Performance of drip emitters for different pressures and application of cashew nuts wastewater

Rafael Oliveira Batista ^a, Ketson Bruno da Silva ^a, Manoel Januário da Silva Júnior ^a, Delfran Batista dos Santos ^b & Rutilene Rodrigues da Cunha ^a

^a Universidade Federal Rural do Semi-Árido, Mossoró, Brazil. rafaelbatista@ufersa.edu.br, ketsonbruno@hotmail.com, mjanuario@ufersa.edu.br, rutilene10@hotmail.com

^b Instituto Federal de Educação, Ciência e Tecnologia da Baiano, Salvador, Brazil. delfran.batista@gmail.com

Received: April 25th, de 2017. Received in revised form: October 27th, 2017. Accepted: Novmeber 8th, 2017

Abstract

The effect of different operating pressures is investigated with regard to the clogging of drip emitters and Christiansen uniformity coefficient (CUC) in drip irrigation systems operating with wastewater from cashew nut processing. The experiment was set on a split-split-plot scheme, with operating pressures (70, 140, 210 and 280 kPa) on plots, emitter models (G1, G2 and G3) on split-plots and assessment times (0, 20, 40, 60, 80, 100, 120, 140 and 160 h) on split-split-plots, in a completely randomized design, with three replicates. CUC of irrigation units was measured every 20 h up to operation time of 160 h. Results showed that drip emitters G2 and G3 were the most suitable for the application of cashew nut wastewater, and the operating pressure of 140 kPa minimized clogging in drip emitters G1, G2 and G3 when operated with cashew nut wastewater.

Keywords: reuse; emitters; clogging.

Desempeño de goteros para diferentes presiones y aplicación de agua residual de castaña de cajú

Resumen

Este estudio tuvo como objetivo analizar el efecto de diferentes presiones de operación en la obstrucción de goteros y en el coeficiente de uniformidad de Christiansen (CUC) en los sistemas de riego por goteo que operan con la agua residual de castanha de cajú. El experimento se estableció en el esquema de parcelas subsubdivididas, con presiones de operación en parcelas (70, 140, 210 y 280 kPa), tipo de goteros en parcelas subdivididas (G1, G2 y G3) y los tiempo de operación en parcelas subsubdivididas (0, 20, 40, 60, 80, 100, 120, 140 y 160 h), en el diseño completamente al azar con tres repeticiones. El CUC de unidades de riego se midió cada 20 h hasta que el tiempo de funcionamiento de 160 h. Los resultados mostraron que los goteros G2 y G3 son los más adecuados para la aplicación de la agua residual de castanha de cajú, y la presión de funcionamiento de 140 kPa minimiza la obstrucción en los goteros G1, G2 y G3 cuando se opera con la agua residual de castanha de cajú.

Palabras clave: reutilización; emisores; obstrucción.

1. Introduction

Cashew culture, with a cultivated area of 740,000 ha and a yearly production of approximately 250 tons of nuts and 2 million tons of stalk, employs some 280,000 people in Brazil. Further, 94% of Brazilian production comes from the Northeastern region, whose largest plantations lie along the coast and within the transition region between the states of Ceará, Piauí and Rio Grande do Norte [1].

Since the cashew nut undergoes several steps within the manufacturing process, large volumes of wastewater are produced. Effluents are generated from washing and humidification processes of nuts and from the cleansing of equipment used in the manufacturing process [2,3]

Drip irrigation systems are recommended for wastewaters due to their high efficiency and low contamination risk of the agricultural product and operators on the field [4]. However, drip irrigation systems feature emitters with significant

How to cite: Batista, R.O., da Silva, K.B., da Silva Júnior, M.J., dos Santos, D.B. and da Cunha, R.R., Performance of drip emitters for different pressures and application of cashew nuts wastewater. DYNA, 85(204), pp. 38-43, March, 2018.

clogging susceptibility [5,6].

The formation of biofilms on drip emitters and on the side lines of drip irrigation systems has become a major issue to farmers and researchers working with the application of wastewater for irrigation [7,8].

The clogging of drip emitters changes the operating pressure rates, flow rate and application uniformity of the drip irrigation system. Agricultural production is consequently impaired [9].

The effects of elevated operating pressure in the hydraulic network of a drip irrigation system with clogged emitters are significant [10]. Results reveal that reduction in flow rate of drip emitters significantly increases at the water distribution pipeline pressure, particularly at 50% clogging.

Pressure increase becomes a low-cost, easy-operation and high-efficiency alternative to prevent biofilm formation and to minimize the clogging of drip emitters. Changes in the operating pressure rates affect the clogging process of drip emitters due to change in the flow regime, resulting in impacts on sediment deposition and biofilm formation [11].

Current assay analyzes the effect of different operating pressures on the clogging of emitters and on the Christiansen uniformity coefficient (CUC) in drip irrigation systems operating with wastewater from cashew nut processing.

2. Materials and methods

Current assay was conducted at the Water Reuse Experimental Unit (WREU) at the Zoo-Botanical Park of the Federal Rural University of the Brazilian Semi-Arid Region (UFERSA), Mossoró RN Brazil, at 5°12'27"S and 37°19'21"W.

An experimental setup for all tests, made of masonry, 2.0 m wide and 8.0 m long, and provided with waterproof floor with inclination of 1%, was assembled at WREU. It also comprised a channel with a 2% inclination for effluent recirculation to minimize losses by evaporation. A masonry reservoir with a capacity to store 5.0 m³ was built downstream of the bench.

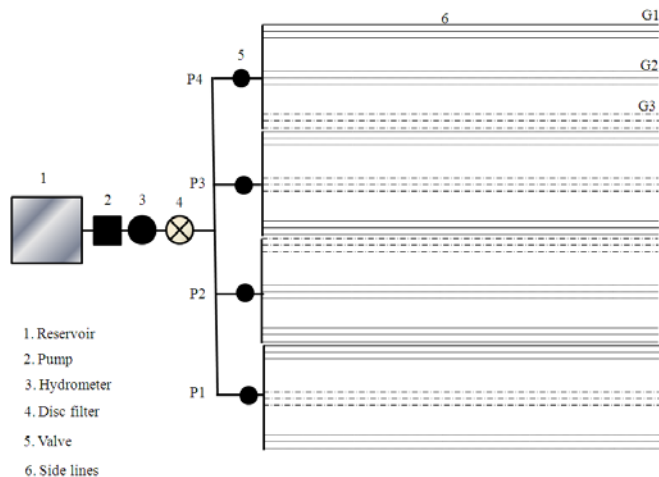


Figure 1. Experimental setup composed of four drip irrigation units operating at pressures 280 (P4), 210 (P3), 140 (P2) and 70 (P1) kPa and with emitter G3, G2 and G1.

Source: The authors

Table 1.

Characteristics of drip emitters (G) used in tests: nominal flow rate (Q), self-compensating device (AD), filtration area (A), labyrinth length (L), recommended pressure range (P) and spacing between emitters (EE).

G	AD	Q (L h ⁻¹)	A (mm ²)	L (mm)	P (kPa)	EE (m)
G1	No	1.65	5.0	58	55 - 100	0.3
G2	Yes	2.0	2.0	35	70 - 400	1.0
G3	Yes	4.0	2.0	35	70 - 400	1.0

Source: The authors

Four drip irrigation units were assembled within the experimental setup. They were composed of a 1.0 hp pump, a 1.5 m³ h⁻¹ hydrometer, a screen filter with 130 μm openings, 32 mm PVC branch line, and polyethylene side lines with nominal diameter of 16 mm, provided with three emitters (Fig. 1).

At the beginning of each branch line, gate valves were installed to control operating pressure in drip irrigation units (70, 140, 210 and 280 kPa) and nine connectors were inserted in the branch line of each fertigation unit.

Three side lines with 8 m in length were installed for each drip emitter model. The three emitters were selected due to their low susceptibility to clogging and to their great availability on the Brazilian market (Table 1).

The drip irrigation units worked, on average, four hours per day, up to 160 h. Flow of drip emitters, effluent application uniformity, volume of effluent applied daily, and physical, chemical and biological characteristics of effluent were determined during the period.

Flow rate was measured in seven emitters from the side lines of drip irrigation units by collecting the volume applied for three minutes. The operating pressure was measured daily with a glycerin pressure gauge, graduated from 0 to 400 kPa.

Performance of drip irrigation units was evaluated every 20 working hours during 160 h of effluent application. The effluent application uniformity was calculated by Eq. 1.

$$CUC = \left(1 - \frac{\sum_{i=1}^n |Q_i - Q_m|}{n_e \cdot Q_m} \right) \cdot 100 \quad (1)$$

where CUC - Christiansen uniformity coefficient, %; Q_i - flow of each drip emitter, L h⁻¹; Q_m - mean drip emitter flow, L h⁻¹; n_e - number of drip emitters.

Wastewater from the processing of cashew nuts used in this study came from the Wastewater Treatment Plant (WWTP) of company AFICEL, Mossoró RN Brazil. The industrial liquid effluent originated from the humidification process of fresh cashew nuts, washing of fresh cashew nuts and floor cleansing.

The physical, chemical and biological characteristics of cashew nuts wastewater were calculated every 20 working hours of drip irrigation units, following recommendations by Standard Methods [12].

In the Laboratory of Soil, Water and Plant Analysis (LSWPA), Department of Environmental and Technological Sciences of UFERSA, pH values were determined by benchtop pH-meter; total iron (Fe) and total manganese (Mn) concentrations were determined by atomic absorption

spectrometry; and calcium (Ca²⁺) and magnesium (Mg²⁺) concentrations were calculated by titration method. The concentrations of suspended solids (SS) and total solids (TS) were determined by the gravimetric method and the concentrations of dissolved solids (DS) were obtained by the difference between TS and SS.

Population levels of total coliforms (TC) were determined at the Laboratory of Inspection of Animal Products, Department of Animal Sciences - UFERSA, by the multiple tubes method.

The experiment was arranged in split-split-plot scheme, with pressures as plots (70, 140, 210 and 280 kPa), drip emitter models as split-plots (G1, G2 and G3) and assessment periods as split-split-plots (0, 20, 40, 60, 80, 100, 120, 140 and 160 h), within a completely randomized design, with three replications.

Data were submitted to analysis of variance (ANOVA) with F test at 5% probability. Means were compared by Tukey's test at 5% probability. Regression models were chosen based on the significance of regression coefficients by applying the "t" test at 10% probability on regression parameters and the process under study.

3. Results and discussion

Table 2 shows the means and standard deviation of physicochemical and microbiological characteristics of wastewater from cashew nut processing.

Table 2 shows that pH, suspended solids (SS) and dissolved solids (DS) provide severe clogging risk of drip emitters, according to guidelines presented by [13]. [14] reported that clogging risk of drip emitters was rated severe for pH and SS in the case of tertiary domestic sewage, whilst clogging risk of drip emitters was rated low for DS. In the case of wastewater from the pulping of coffee fruits, [15] and [5] revealed that clogging risks of drip emitters were classified as low, moderate and severe, for pH, SS and DS.

Total manganese (Mn) and total iron (Fe) showed moderate risk of clogging of drip emitters, already established by [13]. The average content of Fe was less than 1.7 mg L⁻¹ obtained by [14], for tertiary domestic sewage, which also represented moderate risk of clogging of drip emitters. Further, [14] demonstrated that Mn was not observed in tertiary domestic sewage and the risk of clogging of drip emitters was rated low.

Calcium (Ca²⁺) and magnesium (Mg²⁺) concentrations in the wastewater of this research showed moderate and low clogging risk of drip emitters, respectively, according to [16].

Table 2. Mean and standard deviation of physical, chemical and microbiological characteristics of wastewater from the processing of cashew nuts.

pH	Ca ²⁺	Mg ²⁺	Mn	Fe	SS	DS	TC
7.61±0.55	11.89±2.32	4.32±1.59	0.30±0.04	0.48±0.06	290±101	2344±110	152±210

pH - Hydrogenionic potential; Ca²⁺ - Calcium in mmol L⁻¹, Mg²⁺ - Magnesium in mmol L⁻¹, Mn - total Manganese in mg L⁻¹; Fe - Total iron in mg L⁻¹, SS - suspended solids in mg L⁻¹, DS - dissolved solids in mg L⁻¹, TC - Total coliforms in MPN 100 mL⁻¹ and MPN - most probable number

Source: The authors


Working with domestic sewage treated through activated sludge system, [6] ranked low and moderate the clogging risk of drip emitters caused by Ca²⁺ and Mg²⁺, respectively, whilst [14], working with tertiary domestic sewage, showed that Ca²⁺ and Mg²⁺ proved to have low clogging risk of drip emitters.

The population level of total coliforms (TC) represented low risk of clogging of drip emitters, following [13]. This result was similar to that forwarded by [6] in which the risk of clogging due to TC was also low.


Fig. 2 shows the Christiansen uniformity coefficient (CUC) in drip irrigation units with G1, G2 and G3 operating with wastewater from the processing of cashew nuts under different operating pressures.

Drip irrigation units with emitter G1 submitted to operating pressures P1, P2, P3 and P4 at initial operation time and 160 hours showed CUC rates of 96 and 68%; 98 to 97%; 95 and 95% and 96 and 98%, respectively (Fig. 2A). According to [17], CUC rates at operation time 160 hours were rated excellent (> 90%) at operating pressures P2, P3 and P4, while this coefficient was

A.

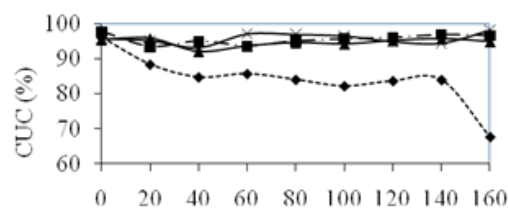

B.

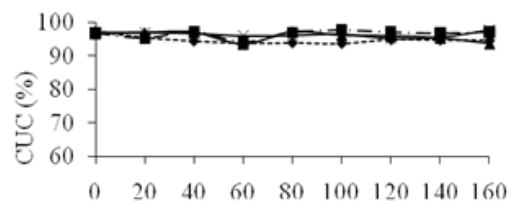

C.

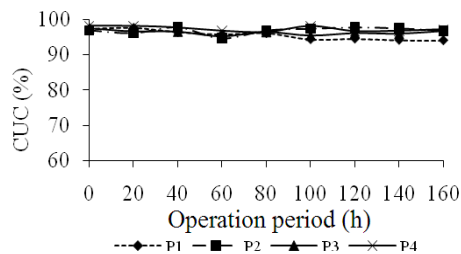


Figure 2. Mean rates of Christiansen uniformity coefficient (CUC) over the operation period of drip irrigation units with emitters G1 (A), G2 (B) and G3 (C) submitted to operating pressures P1 (70 kPa), P2 (140 kPa), P3 (210 kPa) and P4 (280 kPa).

Source: The authors

rated poor at operating pressure P1. Irrigation units with emitter G2, submitted to operating pressures P1, P2, P3 and P4 at initial operation time and 160 hours showed CUC rates of 97 and 95%, 97 and 97%, 97 and 94% and 97 and 98%, respectively (Fig. 2B). All CUC rates were rated excellent (>90%) by [17].

At initial operation times and 160 hours, the drip irrigation units with emitter G3 submitted to operating pressures P1, P2, P3 and P4 showed CUC rates of 97 and 94%; 97 and 97%; 98 and 97% and 98 and 97%, respectively (Figure 2C). All CUC values were rated excellent (> 90%) by [17].

When compared to G2 and G3 in operating pressure P1 (70 kPa), a greater clogging susceptibility of emitter G1 was associated with increased labyrinth length and lower flow, conditions in which effluent flow velocity inside the emitter is lower, favoring particle deposition as adhesion of bacteria-forming biofilms. Above results corroborate those by [6-8,14,18].

Table 3 summarizes the analysis of variance (ANOVA) of CUC of drip irrigation units with G1, G2 and G3 under different operating pressures in the split-split-plots scheme. In fact, the interaction between operating pressure (P), drip emitter model (G) and operation time (T) was significant at 1% probability by F test, and according to ANOVA results, the P x G x T interaction was performed.

Table 4 shows regression equations with the best fit to the CUC variable of irrigation units as a function of the operating pressure and operation time for different emitters.

Table 3. Summary of the analysis of variance for CUC in the split-split-plot scheme.

Source of variation	Degree of freedom	Mean square CUC
Operating pressure (P)	3	450.59**
Wastewater (a)	6	4.06
Drip emitter model (G)	2	495.41**
P x G	6	219.88**
Wastewater (b)	16	1.89
Operation time (T)	8	27.10**
P x T	24	24.78**
G x T	16	11.15**
P x G x T	48	13.98**
Wastewater (c)	194	2.18
VC (%) plot		2.12
VC (%) split-plot		1.45
VC (%) split-split-plot		1.55

F ** significant at 0.01 probability, VC - variation coefficient
Source: The authors

Table 4. Regression equations of CUC variable of irrigation units as a function of the operating pressures and operation times for different drip emitter models studied and their determination coefficients.

G	Regression equations	R ²
1	$CUC = 73.0229 - 0.02257 * T + 0.2309 ** P - 0.0005201 ** P^2$	0.60
2	$CUC = 95.8845$	-
3	$CUC = 96.4973$	-

* and ** Significant at 0.01 and 0.05 probability, respectively, by t test, P – operating pressure, T - Operation time.
Source: The authors

Table 5. Mean CUC rates (%) of irrigation units with different emitter models at different operation times and pressures.

Operation time (h)	Drip emitter	Operating pressure*			
		P1	P2	P3	P4
0	G1	96.12 a	97.78 a	95.41 a	95.75 a
	G2	97.30 a	96.77 a	96.62 a	96.99 a
	G3	97.22 a	96.93 a	97.50 a	97.96 a
20	G1	88.42 b	93.47 a	94.33 a	95.21 b
	G2	95.44 a	95.28 a	95.73 a	96.98 ab
	G3	97.51 a	96.14 a	94.91 a	98.10 a
40	G1	84.79 b	95.00 a	92.00 b	93.27 b
	G2	94.48 a	97.29 a	97.01 a	96.68 a
	G3	96.36 a	97.72 a	96.56 a	97.67 a
60	G1	85.77 b	93.64 a	93.60 a	97.15 a
	G2	93.85 a	94.12 a	93.44 a	95.97 a
	G3	95.75 a	93.64 a	95.24 a	96.77 a
80	G1	84.09 b	95.04 a	94.57 a	96.99 a
	G2	93.94 a	96.96 a	97.21 a	96.10 a
	G3	96.09 a	96.87 a	96.45 a	96.39 a
100	G1	82.25 b	95.61 a	94.17 a	96.54 a
	G2	93.76 a	97.66 a	96.09 a	96.48 a
	G3	94.38 a	97.31 a	95.45 a	98.08 a
120	G1	83.73 b	96.03 a	95.15 a	94.95 a
	G2	94.88 a	97.04 a	95.96 a	95.22 a
	G3	94.54 a	96.03 a	96.12 a	96.66 a
140	G1	84.02 b	96.83 a	95.66 a	94.49 a
	G2	94.75 a	96.72 a	95.28 a	95.58 a
	G3	94.17 a	97.44 a	95.98 a	96.78 a
160	G1	67.74 b	96.59 a	94.87 ab	98.20 a
	G2	94.67 a	97.14 a	93.62 b	97.65 a
	G3	94.05 a	96.81 a	96.73 a	97.17 a

* Means followed by the same letter in the columns for each operation time and operating pressure do not differ at 5% probability by Tukey's test; P1 = 70 kPa; P2 = 140 kPa; P3 = 210 kPa; P4 = 280 kPa.
Source: The authors

A quadratic effect of the operating pressure and a linear effect of the operation time in the change of CUC rates were registered in irrigation units with emitter G1. In this case, the regression equation adjusted to the CUC rate showed a coefficient (R^2) of 0.60. Results corroborated those obtained by [5], who worked with non-self-compensating drip emitter of 1.7 L h^{-1} , operating with swine wastewater and showed that the quadratic model was the one that best fitted the relationship between CUC and operation time.

There was no effect of operating pressure and operation time on the change in CUC rates of drip irrigation units with emitters G2 and G3. Averages were used.

Table 5 shows mean rates of CUC variable of drip irrigation units for emitter factor within each operation time and operating pressure level using wastewater from the processing of cashew nuts.

In operating pressure P1, the CUC of drip irrigation unit with emitter G1 differed from the CUC of irrigation units with emitters G2 and G3 from 20-hour operation time.

In operating pressure P2, there was no significant variation in the CUC of irrigation units with emitters G1, G2 and G3 during the 160h-operation time. The above indicated lower levels of clogging due to the predominance of effluent flow rate in the emitter that impairs particle sedimentation and biofilm formation.

In operating pressure P3, the CUC of drip irrigation unit with G1 differed from CUC of irrigation units with G2 and G3 during the 40-hour operation time. In the 160h-operation time, the CUC of drip irrigation unit with G3 differed from CUC of drip irrigation unit with G2.

In operating pressure P4, the CUC of drip irrigation unit with G1 differed from CUC of drip irrigation unit with G3 in the 20hour-operation time. CUC of irrigation unit with emitter G1 differed from CUC of drip irrigation units with emitters G2 and G3 at 40h-operation time.

It should be underscored that, among the four operating pressures tested, P2 had the best indicators of hydraulic performance. In fact, it is highly recommended for drip irrigation system operating with wastewater generated from the processing of cashew nuts.

Complex biofilm in the three drip emitter models typically develops from the interaction between physical (pH, suspended solids), chemical (dissolved solids, calcium, magnesium and manganese) and biological agents (bacteria). More visible biofilm occurred in the labyrinths of the three drip emitter models. Fig. 3 shows illustrations of drip emitters with biofilm. Biofilm formation was probably due to the lack of opening of end sidelines for cleaning, leading to enhanced clogging effects. Similar process was observed in [7] and [11].

5. Conclusions

Drip emitters G2 and G3 were the most suitable for application of wastewater from the processing of cashew nuts.

Operating pressure of 140 kPa minimized clogging of emitters G1, G2 and G3 with wastewater from cashew nuts processing.



Figure 3. Drip emitters with biofilm: G1 (A), G2 (B) and G3 (C).
Source: The authors

References

- [1] Oliveira, V.H., *Cajucultura. Revista Brasileira de Fruticultura*, 30(1), pp. 1-3, 2008. DOI: 10.1590/S0100-29452008000100001
- [2] Chedeville, O., Debaq, M. and Porte, C., Removal of phenolic compounds present in olive mill wastewaters by ozonization. *Desalination*, 249(2), pp. 865-869, 2009. DOI: 10.1016/j.desal.2009.04.014
- [3] Lopes, M.S.S., Oliveira, P.C.C., Andrade, M.V.F., Araújo, R.S., Marinho, G. and Rodrigues, K., Remoção de macronutrientes de efluente da indústria de castanha de caju por uso de reator aeróbio em batelada com inoculo fúngico. *Revista Brasileira de Engenharia Sanitária e Ambiental*, 16(1), pp. 17-26, 2011. DOI: 10.1590/S1413-41522011000100005
- [4] Souza, J.A.A., Batista, R.O., Ramos, M.M. and Soares, A.A., Contaminação microbiológica do perfil do solo com esgoto sanitário. *Acta Scientiarum. Technology*, 33(1), pp. 5-8, 2011. DOI: 10.4025/actascitechnol.v33i1.5350
- [5] Batista, R.O., Matos, A.T., Cunha, F.F. and Lo Monaco, P.A., Formação de biofilme em gotejadores aplicando água residuária da despolpa dos frutos do cafeeiro. *Acta Scientiarum. Agronomy*, 29(1), pp. 367-371, 2007. DOI: 10.4025/actasciagron.v29i3.289
- [6] Liu, H. and Huang, G., Laboratory experiment on drip emitter clogging with fresh water and treated sewage effluent. *Agricultural Water Management*, 96(5), pp. 745-756, 2009. DOI: 10.1016/j.agwat.2008.10.014
- [7] Dazhuang, Y., Zhihui, B., Rowan, M., Likun, G., Shumei, R. and Peiling, Y., Biofilm structure and its influence on clogging in drip irrigation emitters distributing reclaimed wastewater. *Journal of Environmental Sciences*, 21(6), pp. 834-841, 2009. DOI: 10.1016/S1001-0742(08)62349-9
- [8] Duran-Ros, M., Puig-Bargues, J., Arbat, G., Barraga, N.J. and Ramirez-de Cartagena, F., Effect of filter, emitter and location on clogging when using effluents. *Agricultural Water Management*, 96(1), 67-79, 2009. DOI: 10.1016/j.agwat.2008.06.005.
- [9] Souza, J.A.A., Cordeiro, E.A. and Costa, E.L., Aplicação de hipoclorito de sódio para recuperação de gotejadores entupidos em irrigação com água ferruginosa. *Revista Brasileira de Engenharia*

- Agrícola e Ambiental, 10(1), pp. 5-9, 2006. DOI: 10.1590/S1415-43662006000100001
- [10] Faria, L.F., Coelho, R.D., Flecha, P.A.N., Robles, W.G.R. and Vásquez, M.A.N., Entupimento de gotejadores e seu efeito na pressão da rede hidráulica de um sistema de microirrigação. *Revista Brasileira de Engenharia Agrícola e Ambiental*, 6(2), pp. 195-198, 2002. DOI: 10.1590/S1415-43662002000200002.
- [11] Batista, R.O., Oliveira, R.A., Santos, D.B., Cunha, F.F. and Medeiros, S.S., Modelos empíricos da aplicação de água residual de suinocultura por gotejadores sob pressões de serviço. *Irriga*, 21(4), pp. 648-661, 2016. DOI: 10.15809/irriga.2016v21n4p648-661.
- [12] Rice, E.W., Baird, R.B. and Clesceri, A.D., *Standard methods for the examination of water and wastewater*. 22. Ed., Washington, APHA, AWWA, WPCR, 2012.
- [13] Nakayama, F.S., Boman, B.J. and Pitts, D., *Maintenance. Microirrigation for crop production: Design, operation, and management*. Lamm, F.R., Ayars, J.E. and Nakayama, F.S., Eds., Amsterdam, 2007, pp. 389-430.
- [14] Batista, R.O., Costa, F.G.B., Lopes, H.S.S., Coelho, D.C.L. and Costa-Paiva, M.R.F., Efeito das características do esgoto doméstico na uniformidade de aplicação de sistemas de irrigação por gotejamento. *Revista Caatinga*, 24(4), pp. 137-144, 2011.
- [15] Cunha, F.F., Matos, A.T., Batista, R.O. and Lo-Monaco, P.A., Uniformidade de distribuição em sistemas de irrigação por gotejamento utilizando água residual da despulpa dos frutos do cafeeiro. *Acta Scientiarum. Agronomy*, 28(1), pp. 143-147, 2006. DOI: 10.4025/actasciagron.v28i1.1706
- [16] Capra, A. and Scicolone, B., Water quality and distribution uniformity in drip/trickle irrigation systems. *Journal of Agricultural Engineering Research*, 70(4), pp. 355-365, 1998. DOI: 10.1006/jaer.1998.0287
- [17] Merriam, J.L. and Keller, J., *Farm irrigation system evaluation: A guide for management*. Logan, Utah State University, 1978.
- [18] Dehghanisanij, H., Yamamoto, T., Ould Ahmad, B.V., Fujiyama, H. and Miyamoto, K., The effect of chlorine on emitter clogging induced by algae and protozoa and the performance of drip irrigation. *Transactions of the ASAE*, 48(2), 519-527, 2005. DOI: 10.13031/2013.18326

K.B. da Silva, received BSc. degree in Agronomy in 2009 and MSc. degree in Irrigation and Drainage in 2012, from the Universidade Federal Rural do Semi-Árido, Mossoró, Brazil.
ORCID: 0000-0002-2553-0513.

R.O. Batista, received BSc. degree in Agricultural Eng. in 2002; MSc. degree in Agricultural Engineering in 2004; PhD. degree in Agricultural Engineering in 2007, all of them from the Universidade Federal de Viçosa, Viçosa, Brazil.
ORCID: 0000-0002-3083-6808.

M.J. da Silva Júnior, received BSc. degree in Agronomy in 2002 by Universidade Federal Rural do Semi-Árido, Mossoró, Brazil; MSc. degree in Agricultural Engineering in 2005 by Universidade Federal de Campina Grande, Campina Grande, Brazil; PhD degree in Irrigation and Drainage in 2009 by Escola Superior de Agricultura Luiz de Queiroz, Piracicaba.
ORCID: 0000-0003-4419-7661.

D.B. dos Santos, received BSc. degree in Agronomy in 1999 by Universidade Federal da Bahia, Cruz das Almas, Bahia; MSc degree in Agricultural Engineering in 2002 by Universidade Federal da Paraíba, Campina Grande, Brazil; PhD degree in Agricultural Engineering in 2005 by Universidade Federal de Viçosa, Viçosa, Brazil.
ORCID: 0000-0003-0670-9689.

R.R. da Cunha, received BSc. in Agricultural and Environmental Engineering in 2014 by Universidade Federal Rural do Semi-Árido, Mossoró, Brazil.
ORCID: 0000-0002-3175-7677.



UNIVERSIDAD NACIONAL DE COLOMBIA

SEDE MEDELLÍN
FACULTAD DE MINAS

Área Curricular de Medio Ambiente

Oferta de Posgrados

Especialización en Aprovechamiento de Recursos Hidráulicos
Especialización en Gestión Ambiental
Maestría en Ingeniería Recursos Hidráulicos
Maestría en Medio Ambiente y Desarrollo
Doctorado en Ingeniería - Recursos Hidráulicos
Doctorado Interinstitucional en Ciencias del Mar

Mayor información:

E-mail: acma_med@unal.edu.co
Teléfono: (57-4) 425 5105